

PROPELLANT FORMULATION DEVELOPMENT FOR FUTURE ARMY WEAPONS SYSTEMS BY MEANS OF ADVANCED MODELING AND FLAME KINETICS RESEARCH

R. Sausa*, M. Grams^a, C. Conner^a, and W. Anderson
US Army Research Laboratory
Aberdeen Proving Ground, MD 21005-5069

ABSTRACT

We apply our experimental and modeling results of a number of burner-stabilized flames relevant to the combustion of solid propellants to calculate the burning rates of tri-amino-guanidinium-azotetrazolate (TAGzT) with and without a nitrate ester-based propellant using our CYCLOPS combustion model that we developed at US Army Research Laboratory. The model employs a detailed, chemical reaction mechanism containing 59 species and 368 reactions. Our calculations show that TAGzT enhances the burning rate of the base propellant over a range of pressures used for rockets and guns; a factor of three at 10 MPa.

1. INTRODUCTION

Predictive modeling of a solid propellant's burn rate is essential to guiding and developing novel propellant formulations for Future Combat Systems and for providing a fundamental screening tool that can result in substantial cost savings compared to experimental formulation and missile and gun firings. As a result, much recent research centers on computer models with detailed chemical mechanisms to predict the burning rate of materials (Miller and Anderson, 2004, and references therein; Miller, 2005). Essential to these models is an accurate knowledge of the gas-phase processes and reaction kinetics. Burner-stabilized flames provide a convenient method to test these mechanisms for accuracy of their reaction's rate constants over a wide temperature range (Grams and Sausa, 2008, and reference therein). In this paper, we report our experimental and modeling results of various burner-stabilized flames, NH_3 , H_2 , HN_3/O_2 , N_2O , NO_2 , and apply these results to predict the burning rate of TAGzT and TAGzT with nitrocellulose (NC), nitrate ester (NE), and nitroglycerine (NG) with our two-phase, combustion model CYCLOPS. TAGzT is a very promising, new high-nitrogen compound whose combustion products are environmentally-safe and also help decrease gun barrel and rocket nozzle erosion, thus

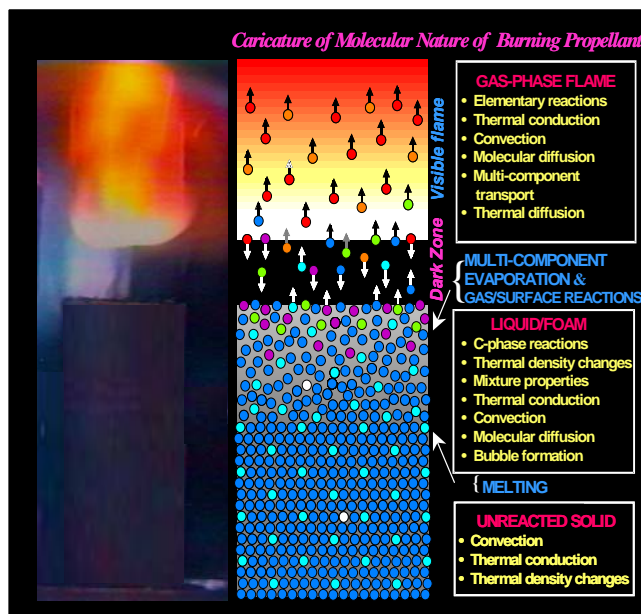


Fig. 1. Burning solid propellant (left) and associated molecular processes (right).

increasing the life-time of those components (Leveritt et al., 2006).

2. EXPERIMENT AND MODEL

We describe the details of our experimental apparatus elsewhere (Grams and Sausa, 2008; Venizelos and Sausa, 2000s; Miller and Anderson, 2004). Figure 1 shows a photograph of burning propellant strand and a drawing depicting the complex molecular processes associated with the event. Briefly, we calculate the burning rates of TAGzT and 20% TAGzT with an 80% nitrate ester-based propellant (NC:NE:NG::60:25:15) over a broad pressure range using Cyclops, a burn-rate predictor developed at the US Army Research Laboratory. The CYCLOPS predictor employs a detailed chemical mechanism containing over 350 elementary chemical reactions involving about sixty species. We derive this mechanism from a critical

^a ARL Postdoctoral Research Associate

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE DEC 2008		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Propellant Formulation Development For Future Army Weapons Systems By Means Of Advanced Modeling And Flame Kinetics Research				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Research Laboratory Aberdeen Proving Ground, MD 21005-5069				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002187. Proceedings of the Army Science Conference (26th) Held in Orlando, Florida on 1-4 December 2008, The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

literature review, and test its H-N-O component with our unique, burner flame apparatus that is equipped with advanced laser spectroscopic and molecular beam, mass-spectrometric diagnostics. We measure the temperature of a number of NH_3 , H_2 , HN_3 / O_2 , N_2O , NO_2 flames by thin-wire thermometry, and the stable and radical species concentrations by molecular beam-mass spectrometry, laser induced fluorescence, or both, as function of height above burner surface. We then compare the experimental species profiles to those we calculate with the Sandia PREMIX flame code containing the propellant's detailed chemical mechanism (Kee et al, 1991, 1994). Rate and sensitivity analyses reveal new chemical information relevant to H-O-N chemistry, which is unique to advanced, high-nitrogen, energetic ingredients such as TAGzT.

3. RESULTS AND DISCUSSION

Overall, our PREMIX flame calculations predict very well the stable species H_2 , HN_3 , N_2O , NH_3 , NO_2 , N_2 , NO , O_2 , and radical species OH and NH for a number of flames. We present representative data in figure 2. Figure 2a (top) shows both the NH LIF and modeled profiles of an $\text{H}_2/\text{O}_2/\text{HN}_3$ flame. The experimental profile is normalized to the modeled profiles near 6 mm for comparison purposes. Figure 2a reveals that the NH concentration decreases rapidly from the burner surface and is zero above 10 mm. The modeled profiles agree very well with the experimental profile at burner distances greater than 4 mm, but not as well near the burner surface. Sensitivity analysis reveals that the reactions $\text{HN}_3 + \text{OH} = \text{N}_3 + \text{H}_2\text{O}$ (R1) and $\text{HN}_3 + \text{NH} = \text{N}_3 + \text{NH}_2$ (R2) are important in determining the NH , HN_3 , and NO concentrations throughout the flame, particularly near the burner surface, and that their rate constants are much higher than those reported in the literature (LeBras and Combourieu, 1973; Li et al., 2006). Our model does a better job predicting our experimental NH data near the burner surface when we decrease the rate expression of reactions R1 and R2 by a factor of four and three, respectively (see figure 2a, model-modified).

The slopes of the NH profiles near the burner surface, 2 to 4 mm, are about two orders of magnitude more than the slope from 4 to 9 mm. This dramatic change in slope suggests that there are two or more reactions that are responsible for NH

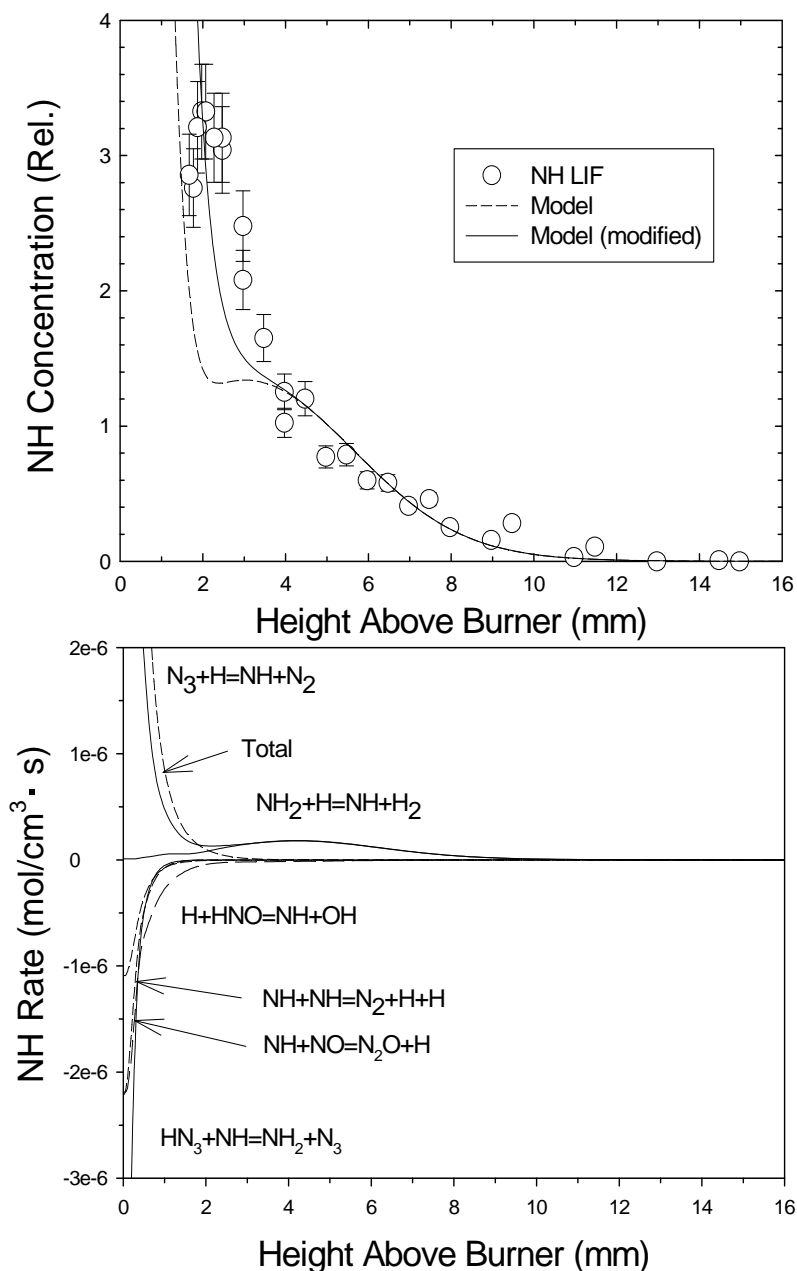


Fig. 2. *NH* LIF and flame model data (top) and modeled *NH* rates.

production and consumption, and that their interplay determines the observed shape of the NH profile. A plot of the calculated NH rate as a function of burner distance, presented in figure 2b (bottom), shows that NH is produced by the reaction $\text{N}_3 + \text{H} = \text{NH} + \text{N}_2$ and consumed by the reactions $\text{HN}_3 + \text{NH} = \text{NH}_2 + \text{N}_3$, $\text{NH} + \text{NH} = \text{N}_2 + \text{H} + \text{H}$, and $\text{NH} + \text{OH} = \text{H} + \text{HNO}$ near the burner surface, less than 2 mm. The reaction $\text{NH}_2 + \text{H} = \text{NH} + \text{H}_2$ plays an important role in forming NH from 2 to 8 mm. The NH peak at 5 mm corresponds to the shoulder in the experimental NH profile near 5 mm.

The diagram illustrates the reaction network for nitrogen chemistry in the interstellar medium. The molecules involved are NH_3 , N_2 , N_2H_2 , N_2O , NO , N , HNO , HONO , NH_2 , and NH . The reactions are labeled with the reactants and products, and the rate coefficients are provided in parentheses. The reactions are color-coded: blue for ion-neutral, green for neutral-neutral, red for neutral-atom, and purple for ion-ion.

Key reactions include:

- $\text{NH}_3 \rightarrow \text{N}_2$ (H (35), NH (12))
- $\text{N}_2 \rightarrow \text{N}_2\text{H}_2$ (H (64), OH (5))
- $\text{N}_2\text{H}_2 \rightarrow \text{N}_2$ (H + M (59))
- $\text{N}_2 \rightarrow \text{N}_2\text{O}$ (H (23))
- $\text{N}_2\text{O} \rightarrow \text{N}_2$ (NO (11))
- $\text{N}_2\text{O} \rightarrow \text{NO}$ (O (13), H (10), OH (5))
- $\text{NO} \rightarrow \text{N}$ (OH (10))
- $\text{N} \rightarrow \text{NO}$ (NH (19), N₂ (4))
- $\text{NO} \rightarrow \text{N}_2$ (H (29), N₂ (6), O (2))
- $\text{NO} \rightarrow \text{NH}$ (NH₃ (12))
- $\text{NH} \rightarrow \text{N}_2$ (H (79))
- $\text{NH} \rightarrow \text{NH}_2$ (H (29), O (2))
- $\text{NH}_2 \rightarrow \text{NH}$ (OH (80), H (15), O (4))
- $\text{NH}_2 \rightarrow \text{N}_2$ (H + M (100))
- $\text{NH} \rightarrow \text{HNO}$ (OH (7))
- $\text{HNO} \rightarrow \text{NO}$ (H (20), O₂ (2))
- $\text{HNO} \rightarrow \text{HONO}$ (OH + M (24))
- $\text{HONO} \rightarrow \text{NO}_2$ (H (22))
- $\text{NO}_2 \rightarrow \text{NO}$ (H + M (15))
- $\text{NO}_2 \rightarrow \text{HNO}$ (H (30), O (1), OH (1))
- $\text{NH}_3 \rightarrow \text{NH}_2$ (H (12))
- $\text{NH}_2 \rightarrow \text{NH}_3$ (H (29), O (2))
- $\text{NH}_3 \rightarrow \text{NH}$ (H (29), N₂ (6), O (2))
- $\text{NH} \rightarrow \text{NH}_3$ (H (29), N₂ (6), O (2))
- $\text{NH}_3 \rightarrow \text{N}_2$ (H (35), NH (12))
- $\text{N}_2 \rightarrow \text{NH}_3$ (H (29), N₂ (6), O (2))
- $\text{NH}_3 \rightarrow \text{NH}_2$ (H (12))
- $\text{NH}_2 \rightarrow \text{NH}_3$ (H (29), O (2))
- $\text{NH}_3 \rightarrow \text{NH}$ (H (29), N₂ (6), O (2))
- $\text{NH} \rightarrow \text{NH}_3$ (H (29), N₂ (6), O (2))
- $\text{NH}_3 \rightarrow \text{N}_2$ (H (35), NH (12))
- $\text{N}_2 \rightarrow \text{NH}_3$ (H (29), N₂ (6), O (2))
- $\text{NH}_3 \rightarrow \text{NH}_2$ (H (12))
- $\text{NH}_2 \rightarrow \text{NH}_3$ (H (29), O (2))
- $\text{NH}_3 \rightarrow \text{NH}$ (H (29), N₂ (6), O (2))
- $\text{NH} \rightarrow \text{NH}_3$ (H (29), N₂ (6), O (2))

Fig. 3. Pathway diagram of an $H_2/O_2/HN_3$ flame

Figure 1 is a log-log plot showing the Linear Burning Rate (cm/s) versus Pressure (MPa) for TAGZT. The y-axis ranges from 0.1 to 100 cm/s, and the x-axis ranges from 0.01 to 1000 MPa. Data points are shown for TAGZT - CYCLOPS Code (red circles), TAGZT - Tappan et al (2006) (blue triangles), and TAGZT - Korobeinichev et al. (black diamonds). A red line represents the CYCLOPS Code simulation results, showing a non-linear increase in burning rate with pressure.

Pressure (MPa)	Linear Burning Rate (cm/s) - CYCLOPS Code	Linear Burning Rate (cm/s) - Tappan et al (2006)	Linear Burning Rate (cm/s) - Korobeinichev et al.
0.1	0.2		0.25
0.3	0.5	0.6	
0.6	0.9		0.9
1.0	1.3	1.5	
2.0	2.5	2.2	
3.0	3.5		
4.0		4.0	
10.0	6.5		
30.0	11.0		
100.0	14.0		
300.0	16.0		

Fig. 4. Modeled and experimental rates of TAGzT

of these reactions are exothermic and provide heat feedback to the surface to gasify the surface products, which in general increase the propellant's burning rate. Near 300 MPa and above, many of these reactions become endothermic and thus provide less heat feedback to the surface compared to the 0.1 MPa reactions. As a result, the propellant's burning rate is less than the expected rate for that pressure and its burning curve deviates from linearity.

Figure 5 shows the experimental and predicted burning rates of TAGzT with and without the base propellant. The model predicts very well the base propellant's burning rates over the pressure regions of 0.3 to 10 MPa (Miller, M., private communication) and 14 to 500 MP (Juhasz et al., 1999). Figure 5 also shows that TAGzT increases the burning rate of the base propellant over the 0.1 to 1000-MPa pressure range. This enhancement is as much as a factor of six at lower pressures, but becomes less significant at 100 MPa and is negligible above 200 MPa.

CONCLUSION

Advanced flame diagnostics and modeling capabilities provide the necessary tools for characterizing new, propellant formulations for Future Force weapons systems. Our CYCLOPS model predicts very well the burning rates of TAGzT over a wide range of pressure, and reveals that TAGzT enhances the burning-rate of the selected nitrate ester propellant. The agreement between experiment and model is a testament to the high quality of the extremely intricate chemical mechanisms that we have developed. Interaction between the flame kinetic studies and propellant models is synergistic in that the flame studies provide mechanistic testing and refinements, while the propellant models highlight features needing further study in the flame experiments

ACKNOWLEDGMENTS

Drs. Grams and Conner are grateful to the National Research Council and Oak Ridge Associated Universities, respectively, for their postdoctoral research associateships. This work is supported by the EQT Program.

REFERENCES

Conner, C. and Anderson, W., 2007: Predicted Burning Rate Enhancement by TAGzT in

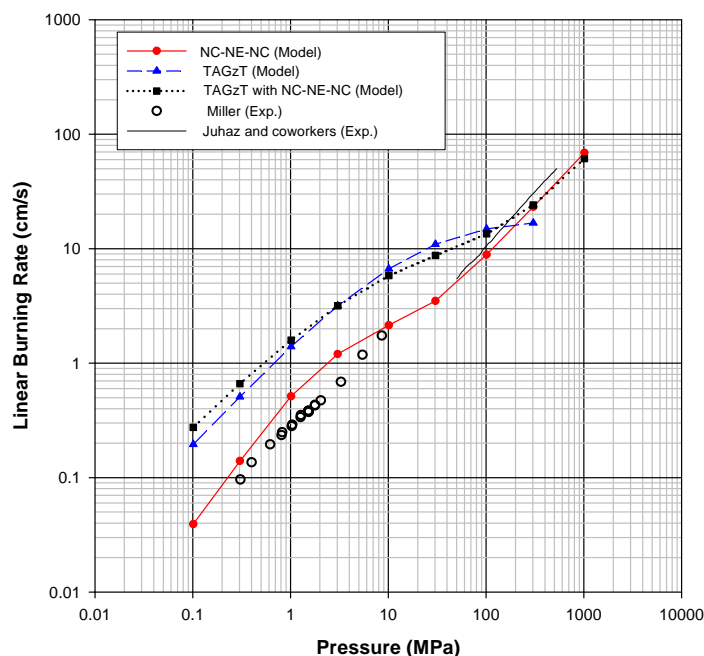


Fig. 5. Modeled and experimental rates of NC-NE-NG with and without TAGzT

The Combustion of Nitrate Ester Propellants, Proceedings, JANNAF 34th Propellant & Explosives Development and Characterization Subcommittee Reno, Nevada August 13 – 17, 2007.

Grams, M.P. and Sausa, R.C., 2008: The Combustion of a Simple, High-Nitrogen Compound: An Experimental and Modeling Study of a Low Pressure, Hydrazoic Acid-Doped Flame, Proceedings, JANNAF 42nd Combustion Meeting, Newton, MA, May 12-16.

Juhasz, A., Bullock, C., Homan, B. and Devynck, D., 1999: Micro Closed Bomb for Characterizing the Burning of Propellants at Gun Pressures," 36th JANNAF Combustion Subcommittee Meeting, CPIA Publ. 691, Vol. 1, Chemical Propulsion Information Agency, Columbia, MD, 175-187, 1999.

Kee, R.J., Grcar, J.F., Smooke, M.D. and Miller, J.A., 1985, 1991: A FORTRAN Program for Modeling Steady, Laminar, One-Dimensional Premixed Flames, Sandia national Laboratories Technical Report SAND 85-8240, December 1985; reprinted March 1991.

Kee, R.J., Rupley, F.M. and Miller, J.A., 1991, 1994: CHEMKIN-II: a FORTRAN Chemical Kinetics Package for the Analysis of Gas-Phase

Chemical Kinetics, Sandia National Laboratories Report SAND89-8009, 1991; reprinted 1994.

Korobeinichev, O., Paletsky, A., Tereshchenko, G., Volkov, E. and Budachev, N., 2006: Combustion Chemistry of Double Base Propellants with Additives of High Energy Materials, Interim ARO Progress Report, Grant Number W911NF-05-1-0549, January 2006

LeBras G. and Combourieu, J., 1973: Reactions of atomic hydrogen and active nitrogen with hydrogen azide, *Int. J. Chem. Kinetics*, 5(4), 559-576.

Leveritt, C., Michienzi, C., Brant, A. and Knott, C., 2006: High-Energy Gun Propellants Containing High-Nitrogen Modifiers, Proceedings, 33rd JANNAF Propellant and Explosives Development and Characterization Subcommittee Meeting, Destin, Florida, March 2006, JSC CD-42.

Li, S., Zhang, Q. and Wang, W., 2006: *Ab initio* and variational transition state approach to atmospheric photooxidation: Mechanism and kinetics for the reaction of HN_3 with OH radical," *Chem. Phys. Let.*, 428(4-6), 262-267.

Miller, M.S., 2005: Burning-Rate Models and Their Successors, a Personal Perspective, in: Overviews of Recent Research on Energetic Materials, R.W. Shaw, T.B. Brill, and D.L. Thompson, Eds., Advanced Series in Physical Chemistry Vol. 16, World Scientific, London, chapter 13.

Miller, M.S. and Anderson, W.R., 2004: Burning-Rate Predictor for Multi-Ingredient Propellants: Nitrate-Ester Propellants," *Journal of Propulsion and Power*, 20(3) 440-454.

Tappan, B., Ali, A., Son, S. and Brill, T., 2006: Decomposition and Ignition of the High-Nitrogen Compounds Triaminoguanidinium Azotetrazolate (TAGzT), Propellants, Explosives, Pyrotechnics 31, 163.

Venizelos, D.T. and Sausa, R.C., 2000: Detailed Chemical Kinetics Studies of an $\text{NH}_3/\text{N}_2\text{O}/\text{Ar}$ Flame by Laser-Induced Fluorescence, Mass Spectrometry, and Modeling, Proceedings of the Combustion Institute, Volume 28, 2411–2418.